


Make me happy

In this project you will make a character that reacts to what you say.

If you compliment it, it will look happy. If you insult it, it will look sad.

At first, you'll program a list of rules for what is kind and what is mean, and learn why that approach isn't very good.

Next, you will teach the computer to recognise kind messages and mean messages by giving it examples of each.

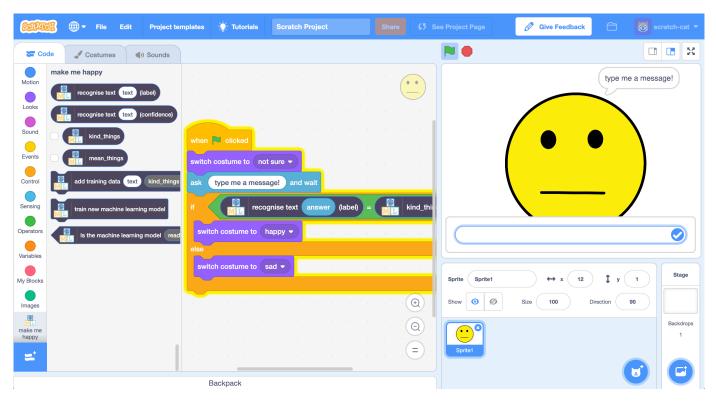



 $This project worksheet is licensed under a Creative Commons Attribution Non-Commercial Share-Alike License \\ http://creativecommons.org/licenses/by-nc-sa/4.0/$

Page 1 of 14 Last updated: 13 April 2019

- **1.** Go to https://machinelearningforkids.co.uk/ in a web browser
- **2.** Click on "**Get started**"

group leader to reset it for you.

- 3. Click on "Log In" and type in your username and password

 If you don't have a username, ask your teacher or group leader to create
 one for you.

 If you can't remember your username or password, ask your teacher or
- 4. Click on "Projects" on the top menu bar
- 5. Click the "+ Add a new project" button.
- **6.** Name your project "make me happy" and set it to learn how to recognise "**text**".

Click the "Create" button

About Projects Worksheets News	Help Log Out		Language
Start a new machine learning project			
make me happy			
Recognising* text	•	What type of thing do you want to teach the computer to recognise? For words, sentences or paragraphs, choose "text" For photos, diagrams and pictures, choose "nimages" For sets of numbers or multiple choices, choose "numbers" For voices and sounds, choose "sounds"	
Language English			CREATE CANCEL

7. You should now see "make me happy" in the list of your projects. Click on it.

Page 2 of 14 Last updated: 13 April 2019

8. Start by getting a project ready in Scratch. Click "Make"




9. Click the Scratch 3 button


10. Click "Scratch by itself"

The page will warn you that you haven't done any machine learning yet, but clicking on **Scratch by itself** will launch Scratch anyway.

11. Delete the cat sprite

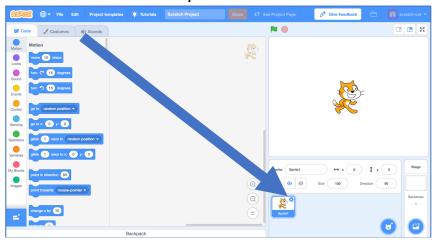


12. Create a new sprite by clicking on the **Paint** icon

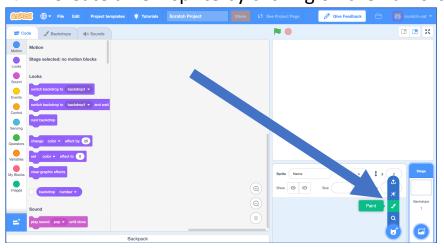


Page 3 of 14 Last updated: 13 April 2019


13. Draw a face without a mouth in the **Costumes** tab

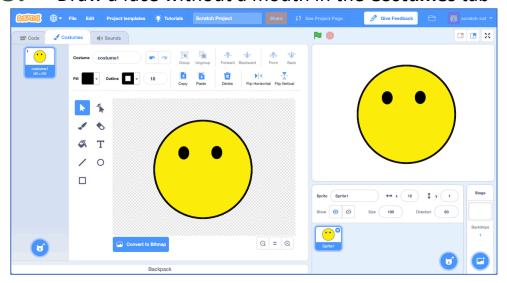

14. Right-click on the costume and click "duplicate". Do that again so you have **three** copies of the costume.



15. Name the three costumes "not sure", "happy" and "sad" *Type the names into the white box shown by the arrow below.*




Page 4 of 14 Last updated: 13 April 2019

16. Draw a mouth on each of the costumes.


The "not sure" face should be a straight line.

The "happy" face should have a smile.

The "sad" face should look sad.

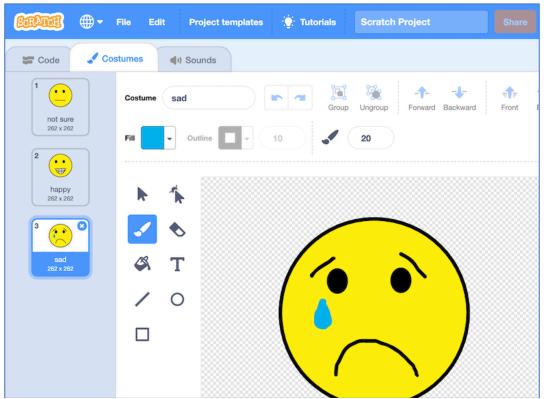

17. Click the "Code" tab and enter the following script.

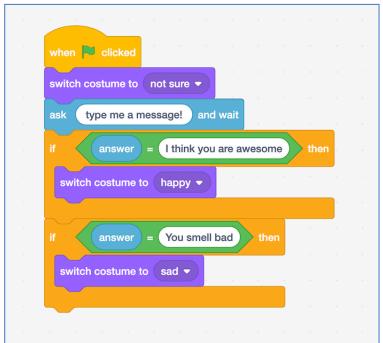

Page 5 of 14 Last updated: 13 April 2019

18. Save your project. Click on File -> Save to your computer to save the project to a file.

19. Click the green flag to test.



20. Type in a message and watch it react!

Type "I think you are awesome" and press enter. The character smiles. Click the green flag again and type "You smell bad". The character cries. Type anything else, and the character's face won't change.

What have you done so far?

You've created a character that should react to what people type, and programmed it using a simple rules-based approach.

If you want it to react to other messages, you need to add more if blocks.

The problem with this is that you need to predict exactly what messages the character will receive. Making a list of every possible message would take forever!


Next, we'll try a better approach – teaching the computer to recognise messages for itself.

Page 6 of 14 Last updated: 13 April 2019

- **21.** Close the Scratch window.
- **22.** You need examples to train the computer. Click the "< Back to project" link. Then click the Train button.




23. Click on "+ Add new label" and call it "kind things". Do that again, and create a second bucket called "mean things".

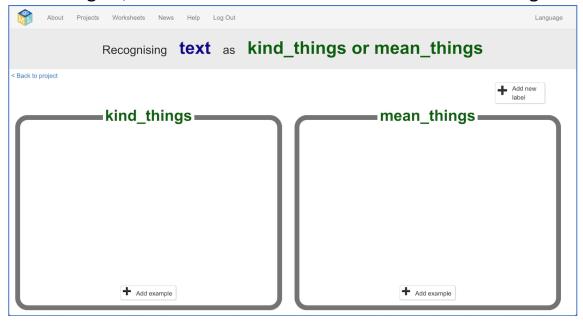


- **24.** Click the "Add example" button in the "kind things" bucket, and type in the nicest, kindest compliment you can think of.
- **25.** Click on the "Add example" button in the "mean things" bucket, and type in a meanest, cruellest insult you can think of.

Page 7 of 14 Last updated: 13 April 2019

26. Repeat steps 24 and 25. Write at least **six** compliments and at least **six** insults.

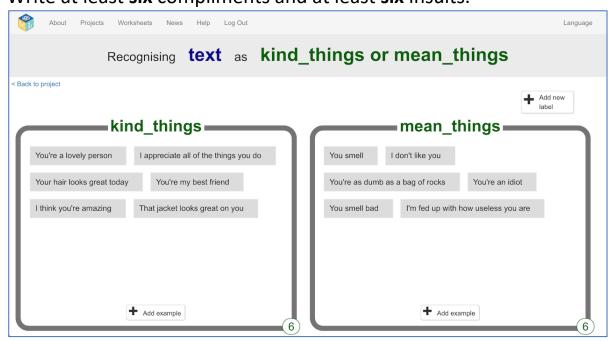

- 27. Click on the "< Back to project" link.
 Then click on the "Learn & Test" button.
- **28.** Click on the "**Train new machine learning model**" button. As long as you've collected enough examples, the computer should start to learn how to recognise messages from the examples you've given to it.

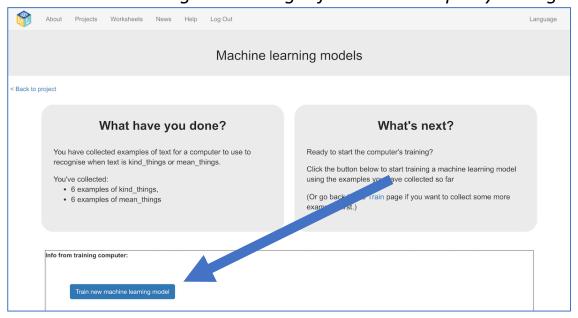


29. Wait for the training to complete. This might take a minute.

Page 8 of 14 Last updated: 13 April 2019

30. Once the training has completed, a Test box will be displayed. Try testing your model to see what the computer has learned. Type something kind, and press enter. It should be recognised as kind. Type something mean, and press enter. It should be recognised as mean. Test it with examples that you haven't shown the computer before. If you're not happy with how the computer recognises the messages, go back to step 26, and add some more examples.

Make sure you repeat step 28 to train with the new examples!

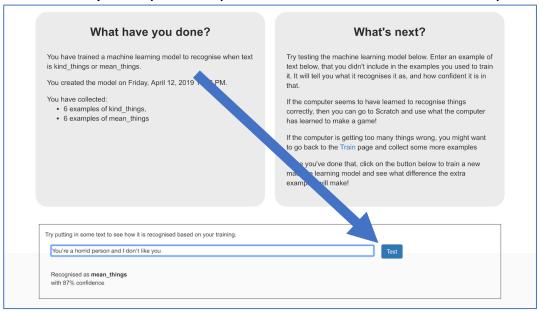

What have you done so far?


You've started to train a computer to recognise text as being kind or mean. Instead of trying to write rules to be able to do this, you are doing it by collecting examples. These examples are being used to train a machine learning "model".

This is called "supervised learning" because of the way you are supervising the computer's training.

The computer will learn from patterns in the examples you've given it, such as the choice of words, and the way sentences are structured. These will be used to be able to recognise new messages.

Page 9 of 14 Last updated: 13 April 2019

- 31. Click the "< Back to project" link
- **32.** Click the "**Make**" button, then the "**Scratch 3**" button. This page has instructions on how to use the new blocks in Scratch. Keep the page open if you need to check back on how to use them.
- **33.** Click the "**Open in Scratch**" button to launch the Scratch editor. You should see new blocks from your project at the bottom of the list.

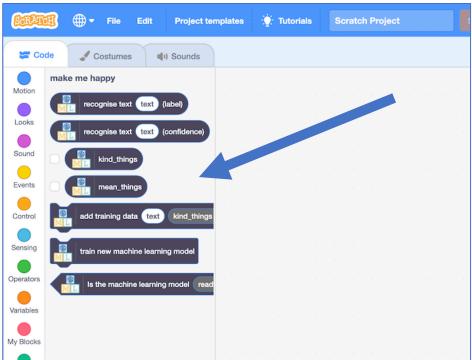

34. Load the Scratch project that you saved earlier *Click on File -> Load from your computer*

Page 10 of 14 Last updated: 13 April 2019

Tips

More examples!

The more examples you give it, the better the computer should get at recognising whether a message is kind or mean.

Try and be even

Try and come up with roughly the same number of examples for kind and mean.

If you have a lot of examples for one type, and not the other, the computer might learn that type is more likely, so you'll affect the way that it learns to recognise messages.

Mix things up with your examples

Try to come up with lots of different types of examples.

For example, make sure that you include some long examples and some very short ones.

Page 11 of 14 Last updated: 13 April 2019

35. Click on the "Code" tab and update the script to use your machine learning model instead of the rules you made before.

The "recognise text ... (label)" block is a new block added by your project. If you give it some text, it will return either "kind things" or "mean things" based on the training you've given to the computer. You can use this to choose the costume to switch to.

when clicked

switch costume to not sure

ask type me a message! and wait

if recognise text answer (label) = kind_things then

switch costume to happy

else

switch costume to sad

switch co

36. Click on the green flag to test again.



37. Test your project

Type a kind message and press enter. The character should smile. Click the green flag again. Type a mean and unkind message and press enter. The character should look sad.

This should work for messages that you didn't include in your training.



What have you done?

You've modified your Scratch character to use machine learning instead of your earlier rules-based approach.

Training the computer to be able to recognise messages for itself should be much quicker than trying to make a list of every possible message.

The more examples you give it, the better it should get at recognising messages correctly.

Page 13 of 14 Last updated: 13 April 2019

Ideas and Extensions

Now that you've finished, why not give one of these ideas a try?

Or come up with one of your own?

Write a reply

Instead of just changing the way they look, make your character reply, based on what it recognises in the message!

Try a different character

Instead of a person's face, why not try something different, like an animal?

It could react in different ways, instead of smiling.

For example, you could make a dog that wags their tail if you say something kind to it!

Different emotions

Instead of kind and mean, could you train the character to recognise other types of message?

Real world sentiment analysis

Can you think of examples where it's useful to be able to train a computer to recognise the emotion in writing?

Page 14 of 14 Last updated: 13 April 2019