
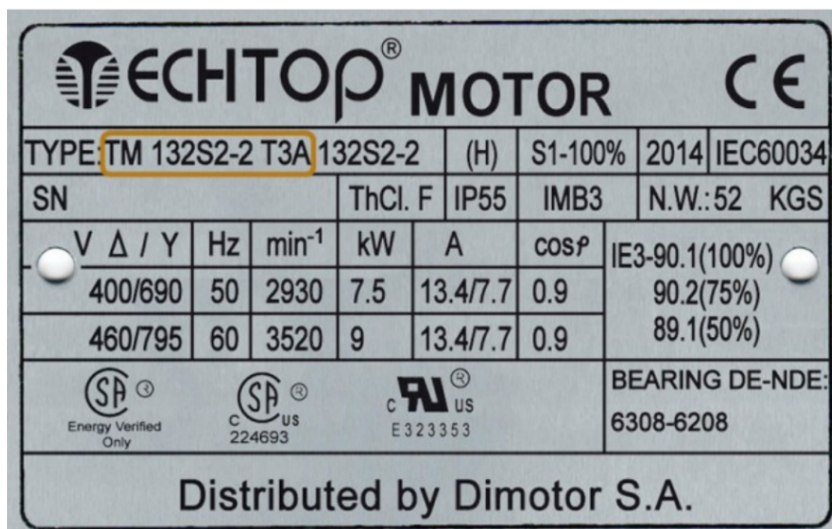


A)

- B)

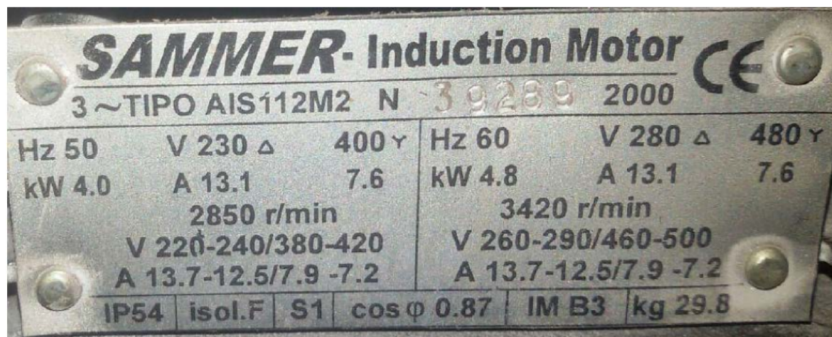

C)

ABB							
3~Motor M2AA 160 L							
IEC 160 M/L 42							
No							
Ins.cl. F						IP 55	
V	Hz	kW	r/min	A	cos φ	I _A /I _N	t _E /S
690 Y	50	15	1460	16.7	0.82		
400 Δ	50	15	1460	29	0.82		
660 Y	50	15	1455	17.3	0.84		
380 Δ	50	15	1455	30	0.84		
415 Δ	50	15	1465	29	0.80		
440 Δ	60	17.5	1755	30	0.85		
Prod.code 3GAA 162 112-ADA							
6309-2Z/C3WT						92	kg

D)

MADE IN VIETNAM				BONFIGLIOLI RIDUTTORI			
3~Mot BN80B4				No 60593450006			
Cod. 830620106				IMB 5 IP 55			
V Δ /Y		I.Cl. F		S 1		cos φ	
		Hz	kW	A Δ /Y		min-1	
230/400		50	0.75	3.2 - 1.85		1400	0.78
460		60	0.9	1.90		1700	
220-240 V Δ		3.2-3.3 A		50Hz			
380-415 VY		1.87-1.90 A		60Hz		A034374	
440-480 VY		1.93-1.92 A					

F)

		DMT by		TECHTOP		 IEC 60034-30	
Tipo: MS 711-2 B14				N°Serie: 1211061790			
S1-100%		IsI.Cl. F		IP 55		KG: 5.2	
V			A				
Δ	Y	HZ	Δ	Y	KW	min-1	cos φ
220	380	50	1.76	1.02	0.37	2720	0.79
230	400	50	1.67	0.97	0.37	2730	0.79
240	415	50	1.61	0.93	0.37	2740	0.79
265	460	60	1.67	0.97	0.40	3280	0.79
	440	60	1.76	1.02	0.40	3280	0.79

G)

			3 ~ MOT AL71-2			04/01 F093255				
INS F ΔI 80 K			IP55							
S 1			CAT			AMB				
V	Hz	KW	A	min-1	cos φ	5.8 Kg LITHIUM BASE				
220-240 Δ	50	0.37	1.54	2790	0.86					
380-415 Y	50	0.37	0.891	2790	0.86					
254-280 Δ	60	0.42	1.52	3400	0.86					
440-480 Y	60	0.42	0.878	3400	0.86					